


00-20111

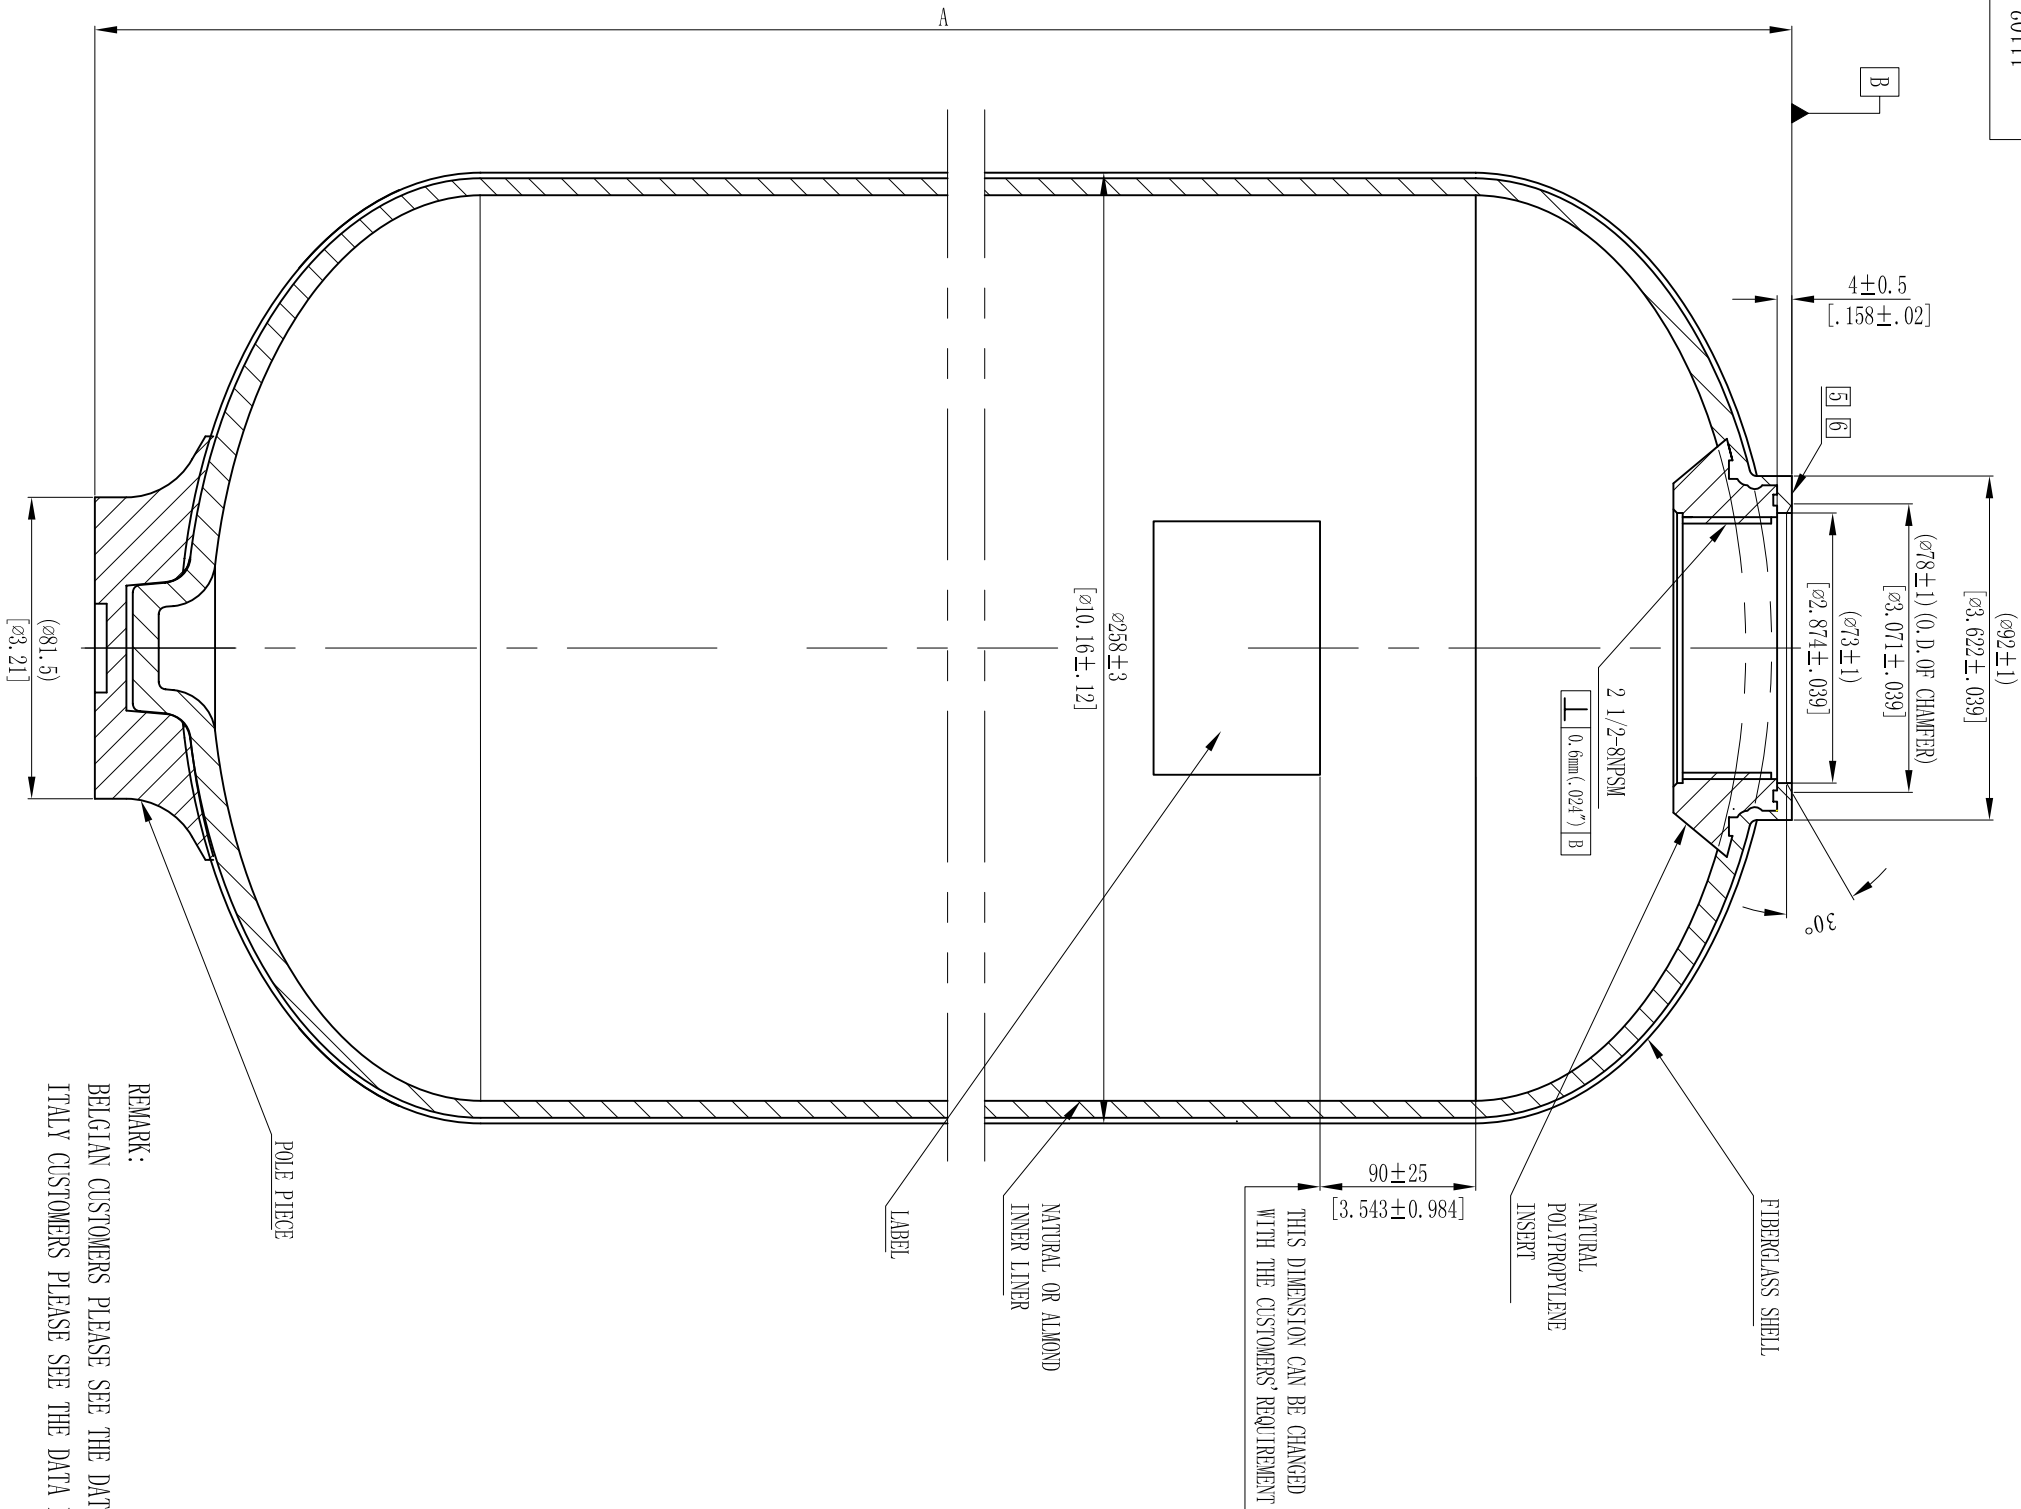

MODEL	A		VOLUME			DOME VOLUME			WEIGHT			
	mm	inch	mm	inch	liters	U.S. GAL.	CUBIC FT	liters	U.S. GAL.	CUBIC FT	Kg	LBS
10x17	430	16.93	4	.16	16.8	4.44	0.59	2.29	0.60	0.08	2.50	5.51
10x30	762	30.0	4	.16	32.4	8.56	1.14	2.29	0.60	0.08	4.00	8.80
10x35	895	35.24	4	.16	38.4	10.15	1.36	2.29	0.60	0.08	4.60	10.13
10x44	1118	44.02	5	.20	50.1	13.24	1.77	2.29	0.60	0.08	6.05	13.31
10x47	1194	47.01	5	.20	54.0	14.27	1.91	2.29	0.60	0.08	6.45	14.19
10x54	1372	54.02	4	.16	62.4	16.49	2.21	2.29	0.60	0.08	7.40	16.28
10x16	406	15.98	4	.16	15.6	4.12	0.55	2.29	0.60	0.08	2.36	5.19
10x18	457	17.99	4	.16	18.0	4.76	0.64	2.29	0.60	0.08	2.62	5.76
10x40	1016	40.0	5	.20	44.9	11.86	1.59	2.29	0.60	0.08	5.30	11.66
10x19	483	19.02	4	.16	19.2	5.07	0.68	2.29	0.60	0.08	2.74	6.03
10x13	340	13.39	4	.16	12.2	3.22	0.43	2.29	0.60	0.08	2.06	4.53
10x22	559	22.01	4	.16	22.9	6.05	0.81	2.29	0.60	0.08	3.10	6.82
10x24	605	23.82	4	.16	25.1	6.63	0.89	2.29	0.60	0.08	3.33	7.33
10x13(b)	328	12.91	+4 -2	+16 -.08	12.2	3.22	0.43	2.29	0.60	0.08	2.06	4.53
10x16(b)	406	15.98	+4 -2	+16 -.08	15.6	4.12	0.55	2.29	0.60	0.08	2.36	5.19
10x18(b)	470	18.50	+4 -2	+16 -.08	18.0	4.76	0.64	2.29	0.60	0.08	2.62	5.76
10x24(b)	605	23.82	+4 -2	+16 -.08	25.1	6.71	0.90	2.29	0.60	0.08	3.33	7.33
10x30(b)	760	29.92	+4 -2	+16 -.08	32.4	8.56	1.14	2.29	0.60	0.08	4.00	8.80
10x32(b)	813	32.01	+4 -2	+16 -.08	35.4	9.35	1.25	2.29	0.60	0.08	4.26	9.37
10x35(b)	890	35.04	+4 -2	+16 -.08	38.4	10.15	1.36	2.29	0.60	0.08	4.60	10.12
10x24(1t.)	605	23.82	+4 -2	+16 -.08	25.1	6.63	0.89	2.29	0.60	0.08	3.33	7.33

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD, LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150 PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-120° F (-1-49°C)
 - MAXIMUM VACUUM - 5"Hg (127mm Hg)
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3×3mm.
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED.
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED.
- SURFACE TO BE FREE OF NICKS, SCRATCHES, RESIN AND GLASS.
- SURFACE FINISH.
- DIMENSIONS IN PARENTHESES ARE REFERENCE ONLY.
- DIMENSIONS IN SQUARE PARENTHESES ARE INCH UNIT.

VERSION NO.	4	DATE	2009/08/10
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):			
SIGNATURE	NAME	DATE	
DESIGN			
INSPECTION			
APPROVAL			
WAVE CYBER (SHANGHAI) CO., LTD.			
SCALE	1 : 2	MATERIAL	
QUANTITY		SMOOTHNESS	
PROJECTION		COMPUTER CODE	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		DRAWING NO.	11102-00
DO NOT MEASURE THE DIMENSIONS.	UNIT: MM	TOTAL PAGE: 1	VERSION NO. 6

REMARK:
 BELGIAN CUSTOMERS PLEASE SEE THE DATA MARKED (b);
 ITALY CUSTOMERS PLEASE SEE THE DATA MARKED (1t.);

POLE PIECE

LABEL

NATURAL OR ALMOND
INNER LINERTHIS DIMENSION CAN BE CHANGED
WITH THE CUSTOMERS' REQUIREMENTNATURAL
POLYPROPYLENE
INSERT

FIBERGLASS SHELL