


A Detail  
1 : 2

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
13×54	1527±6	1136	736	105.7L	12.23	1.43 m <sup>2</sup>

NOTE:

1. TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
2. MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
3. DIMENSIONAL TOLERANCE: SJ1372-78, GRADE 8.
4. TANK IS SUPPLIED WITH ADAPTOR:

- 1.5"NPT MALE ADAPTOR / 1¼" SOCKET ADAPTOR
- 1.5"BSP MALE ADAPTOR / 40mm SOCKET ADAPTOR

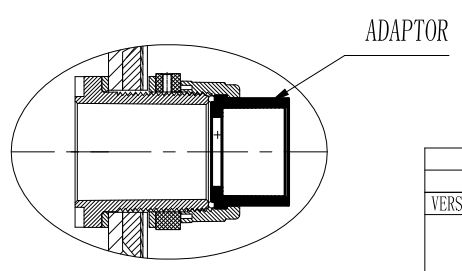

VERSION NO.		DESCRIPTION OF CHANGES:		SIGNATURE	DATE
REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):					
SIGNATURE		<b>WAVE CYBER (SHANGHAI) CO., LTD.</b>			
NAME	DATE				
DESIGN		SCALE	MATERIAL	MODEL	
INSPECTION				DESCRIPTION	
APPROVAL		QUANTITY	WEIGHT	13"VESSEL(4"×4" inlet) (Threaded Side Inlets)	
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		PROJECTION	COMPUTER CODE	DRAWING NO.	VERSION NO.
		DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	TOTAL PAGE: 1